



Automotive Lighting Solutions

Lighting in the automotive industry is heading towards a transition stage with several technological advancements emerging in the market, enabling enhanced performance, safety, security and aesthetics. Based on the current trend, investments in R&D by major OEMs make it evident that there will be a significant growth in the lighting sector.


In Automotive industry particularly in lighting segment a new era came with the light emitting diodes (LED). Due to their advantages like smaller size, high efficiency, lower energy consumption and thus fuel efficiency, long service life and design freedom, LEDs are becoming a more popular choice to replace traditional lamps.

Their small size and design flexibility let them fit very well in the interior lighting, creating comfortable ambience and good mood, which improves the concentration of the driver. While in the exterior lighting, the laser headlight, LED/OLED matrix are added to the high beam, promoting higher luminance and greater visibility, to enhance safety driving.

Discrete components always provide flexibility in choosing the perfect match based on the circuit requirements. By choosing the best suited semiconductor components in the design, power losses decrease and energy savings can be pushed even further. Hence, the selection of the right components can also boost-up the overall performance.

Diotec offers a wide range of silicon based, power discrete components such as small signal, high voltage, transient protection, current limiting, Schottky, Zener diodes and transistors.


The following block diagram shows the typical energy regulation procedure from a Battery, DC voltage to a Constant output current:

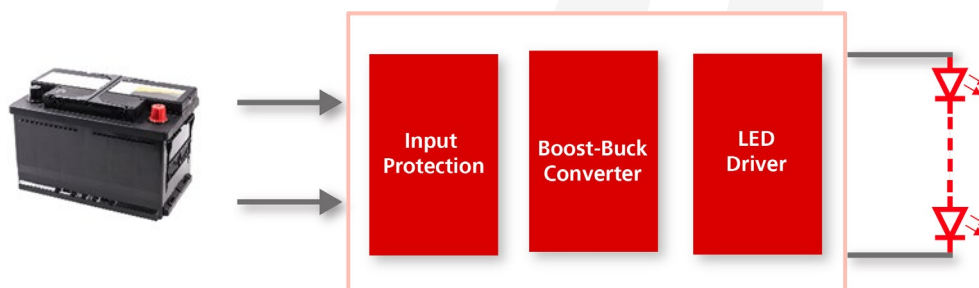

Block diagram for typical automotive lighting applications

The overall function of the automotive lighting can be classified into three groups:

- 1) Power management system, which has different stages such as AC-DC rectification, power factor correction, DC-DC conversion for Alternator driven power supply. While Battery power supply is as an alternative/additional external source in parallel to the power supply from alternator.
- 2) Protection Circuit: One of the major technical challenges faced in automotive electronics is the protection against variety of electrical transient voltages. It includes load-dump protection from regular happening events due to disconnection of vehicle battery from the alternator while the battery being charged, ESD protection from the humans and most unlikely event like lightning. By adding extra protection components, it is possible to protect the automotive electronics from such higher voltage disturbances.
- 3) Electronic control and gate drive units: In the modern automobiles, the entire lighting systems are being controlled by intelligent lighting control systems to distribute power, sense the inputs, control and actuation function. It would facilitate to improve the energy savings, efficiency and helps to optimize the usage.

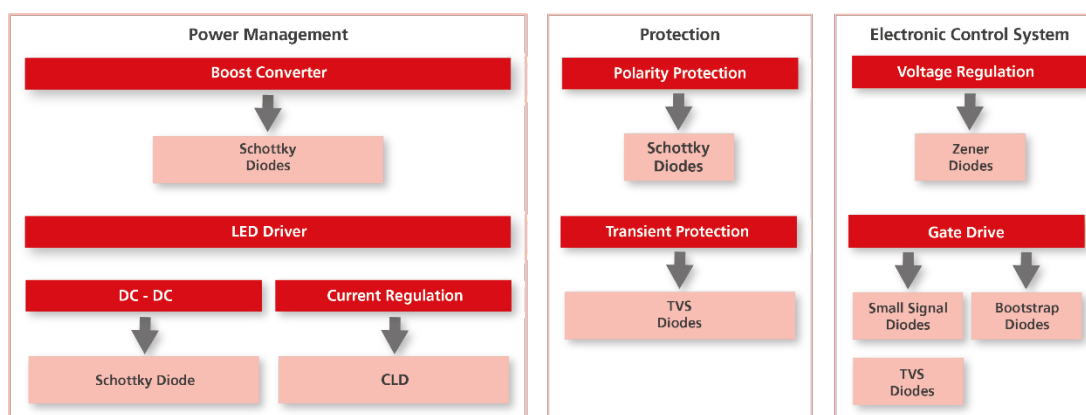

Protection Circuit

Reverse Polarity Protection

Schottky Diodes

Part no	Package	I_{FAV}	V_{RRM}
PPS1040 ... 60 (-3G)	Power SMD	10 A	40 ... 60 V
PPS1540 ... 60 (-3G)	Power SMD	15 A	40 ... 60 V
SK1040...100D1)(-3G)	D-PAK	10A	40...100 V
SK1040...100D2 (-3G)	D2-PAK single	10A	40...100 V
SK2040...100CD2 (-3G)	D2-PAK dual	2x 10A	40...100 V
SK3040...100CD2 (-3G)	D2-PAK dual	2x 15A	40...100 V
SK4040...45CD2 (-3G)	D2-PAK dual	2x 20A	40...45 V
SBT1040...100 (-3G)	TO-220AC	10A	40 ... 100 V
SBCT1040...100 (-3G)	TO-220AB dual	2x 5A	40 ... 100 V
SBCT2040...100 (-3G)	TO-220AB dual	2x 10A	40 ... 100 V
SBCT30100...150	TO-220AB dual	2x 15A	100 ... 150 V

-3G: Available in 3rd Generation Schottky Technology with low V_F and low I_R

Transient Protection

TVS Diodes (Load dump, Transient protection)

Part no	Package	$PPPM / I_{FAV}^*$	V_{WM}	V_{BR}
4.6SM6Z...	DO-218AB	4600 W	10 ... 43V	11.1 ... 52.8 V
6.6SM8Z...	DO-218AB	6600 W	10 ... 43 V	11.1 ... 52.8 V
5KP...	D8 x 7.5	5000 W	6.5 ... 120 V	7.2 ... 133 V
BYZ35...	D12.75 x 4.2 / Press-fit	35 A*	17.8 ... 38.1 V	22 ... 47 V
BYZ50...	D12.75 x 4.2 / Press-fit	50 A*	17.8 ... 38.1 V	22 ... 47 V

Diodec offers product families for load dump protection according to ISO 16750-2: 2012 (E), both for the application without central load dump limit (according to standard Table 5, test A) and for those with central limitation (Table 6, Test B).

The new 6.6SM8Z series with 6.6kW peak pulse power in DO-218AB is already available, it will soon be supplemented by the 4.6SM6Z with 4.6kW. Both variants conform to AEC-Q101. The 5KP series represents an alternative in the axial housing, it allows up to 5kW in the usual design with 10 / 1000µs pulses.

Classic alternator rectifier diodes in the Pressfit package are the BYZ35 and BYZ50, which we offer especially for the After Sales market. They have a delimiter feature and thus provide the central load dump protection.

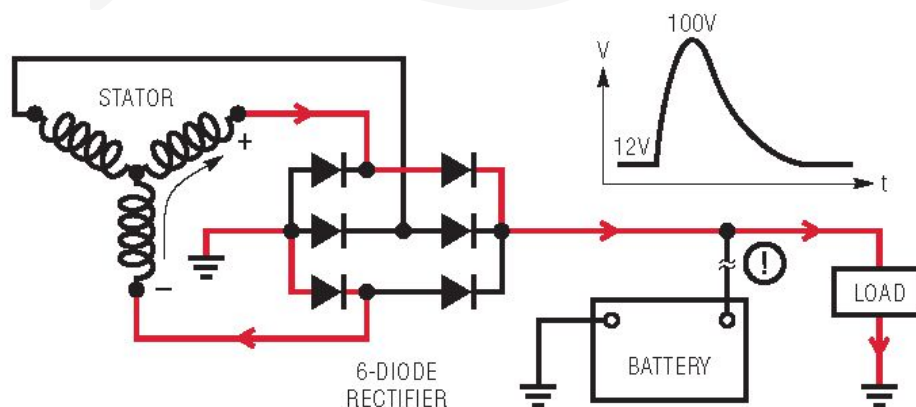


Figure: Typical load dump surge, during disconnection of the battery when alternator is in operation ¹⁾

Boost Converter

Schottky Diode

Part no	Package	I _{FAV}	V _{RRM}
SKL34 ... 36	SOD-123F	3 A	40 ... 60 V
SK34SMA-3G ... 315SMA (-3G)	DO-214AC/SMA	3 A	40 ... 150 V
SK420	DO-214AB/SMC	4 A	200 V
SK54 ... 515 (-3G)	DO-214AA/SMB	5 A	40 ... 150 V
SK84 ... 815 (-3G)	DO-214AB/SMC	8 A	40 ... 150 V

-3G: Available in 3rd Generation Schottky Technology with low V_F and low I_R

LED Driver

DC – DC Converter

Schottky Output Rectifiers

Part no	Package	I _{FAV}	V _{RRM}
PPS1040 ... 60 (-3G)	Power SMD	10 A	40 ... 60 V
PPS1540 ... 60 (-3G)	Power SMD	15 A	40 ... 60 V
SK1040...100D1 (-3G)	D-PAK	10A	40...100 V
SK1040...100D2 (-3G)	D2-PAK single	10A	40...100 V
SK2040...100CD2 (-3G)	D2-PAK dual	2x 10A	40...100 V
SK3040...100CD2 (-3G)	D2-PAK dual	2x 15A	40...100 V
SK4040...45CD2 (-3G)	D2-PAK dual	2x 20A	40...45 V
SBT1040...100 (-3G)	TO-220AC	10A	40 ... 100 V
SBCT1040...100 (-3G)	TO-220AB dual	2x 5A	40 ... 100 V
SBCT2040...100 (-3G)	TO-220AB dual	2x 10A	40 ... 100 V
SBCT30100...150	TO-220AB dual	2x 15A	100 ... 150 V

-3G: Available in 3rd Generation Schottky Technology with low V_F and low I_R

Part no	Package	I _{FAV}	V _{RRM}
SKL34 ... 36	SOD-123F	3 A	40 ... 60 V
SK34SMA-3G ... 315SMA (-3G)	DO-214AC/SMA	3 A	40 ... 150 V
SK420	DO-214AB/SMC	4 A	200 V
SK54 ... 515 (-3G)	DO-214AA/SMB	5 A	40 ... 150 V
SK84 ... 815 (-3G)	DO-214AB/SMC	8 A	40 ... 150 V

-3G: Available in 3rd Generation Schottky Technology with low V_F and low I_R

Zener Diodes

Part no	Package	P _{tot}	V _Z
MM3Z	SOD-323	300 mW	2.4 ... 47 V
BZT52	SOD-123	500 mW	2.4 ... 75 V
ZMC	Micro Melf	500 mW	2.4 ... 75 V

Current Regulation

CLD (Constant Current Regulator)

Part no	Package	I_{Pnom}	V_{AK}
CL10MD ... 30MD	DO-213AA/MiniMelf	20 ... 40 mA	90 V
CL15M35 ... 40M35	DO-214AC/SMA	15 ... 40 mA	90 V
CL15M45 ... 40M45	DO-214AA/SMB	15 ... 40 mA	90 V

Electronic Control and Gate Drive

Zener Diodes

Part no	Package	P_{tot}	V_z
MM3Z	SOD-323	300 mW	2.4 ... 47 V
BZT52	SOD-123	500 mW	2.4 ... 75 V
ZMC	Micro Melf	500 mW	2.4 ... 75 V


Small Signal Diodes

Part no	Package	I_{FAV}	V_{RRM}
1N4148WS	SOD-323	150 mA	100 V
BAT54A	SOT-23	200 mA	30 V
BAV99	SOT-23	215 mA	85 V

Schottky Diodes

Part no	Package	I_{FAV}	V_{RRM}
BAT54A	SOT-23	200 mA	30 V
BAS40-05	SOT-23	200 mA	40 V

Bootstrap Diodes

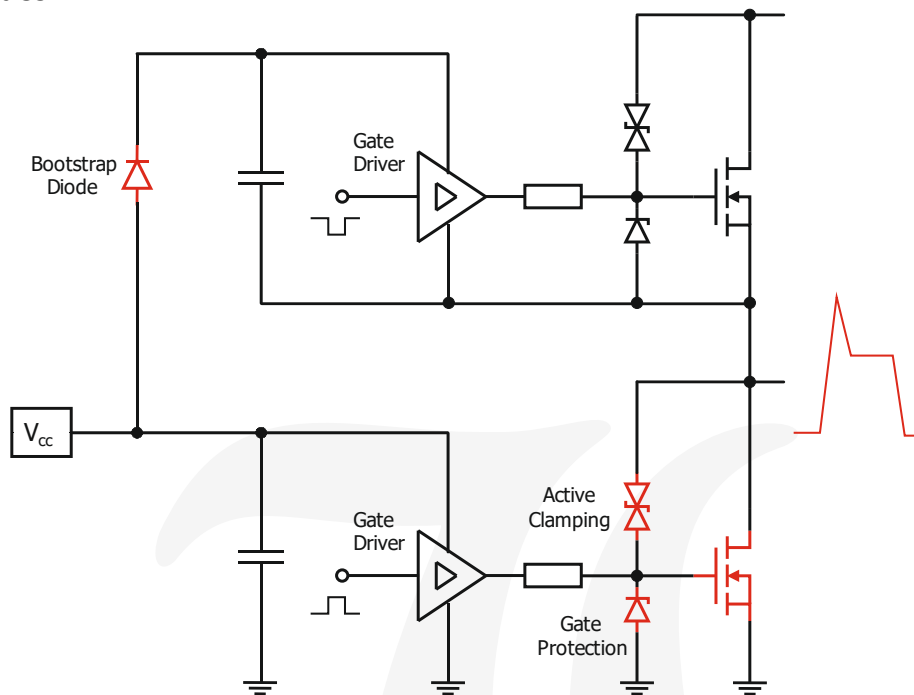

Part no	Package	I_{FAV}	V_{RRM}
FR2TSMA...FR2YSMA (Fast)	DO-214AC/SMA	1 A	1300 ... 2000 V
BYG23T (Superfast / Avalanche)	DO-214AC/SMA	1A	1300V

TVS Diodes (Gate Protection/Active Clamping)

Part no	Package	P_{PPM}	V_{WM}	V_{BR}
TGL34-...	DO-213AA/MiniMelf	150 W	5.5 ... 171 V	6.8 ... 200 V
SMF...	SOD-123FL	200 W	5.0 ... 220 V	6.8 ... 260 V
TGL41-...	DO-213AB/Melf	400 W	5.5 ... 423 V	6.8 ... 520 V
P4SMA...	DO-214AC/SMA	400 W	5.0 ... 495 V	6.8 ... 550 V
P6SMB...	DO-214AA/SMB	600 W	5.0 ... 495 V	6.8 ... 550 V
1.5SMC...	DO-214AB/SMC	1500 W	5.0 ... 495 V	6.8 ... 550 V

¹⁾ Source: Low Quiescent Current Surge Stopper: Robust Automotive Supply Protection for ISO 7637-2 and ISO 16750-2 Compliance, Dan Eddleman, LT Journal of a Analog Innovation, January 2017

All rights reserved

The information presented in our data sheets and other documents is to the best of our knowledge true and accurate. It describes the type of component or application and shall not be considered as assured characteristics. No warranty or guarantee, expressed or implied is made regarding the capacity, delivery, performance or suitability of any product or circuit etc, neither does it convey any license under the patent rights of others.

Diodec reserves the right to make changes without further notice. However, regular updating of all product information is provided on our website ¹⁾. All Diodec products are sold and shipped subject to our "Standard Terms and Conditions of Business" ²⁾. The reproduction of all documents is prohibited without the expressed written permission of Diodec Semiconductor AG's Managing Board.

Disclaimer

1. All products described or contained are designed and intended for use in standard applications, so called commercial/ industrial grade, requiring an ordinary level of reliability.

2. Some products are available with the special grades "AEC-Q101 compliant" respectively "AEC-Q101 qualified". These are automotive standards ³⁾.

3. Customers using these parts in applications requiring a special or specific grade of quality or reliability, such as (but not limited to) life supporting devices or systems, where failure or malfunction of the product may directly affect human life or health, are obliged to validate whether the use in such cases is appropriate.

Diodec does not assume any liability arising out of such applications or uses of its products. Usage in all such cases is on the own and sole risk of the customer.

4. Although Diodec continuously enhances the quality and reliability of its products, customers must incorporate sufficient safety measures in their designs, such as redundancy, fire containment, and anti-failure, so that personal injury, fire or environmental damage can be prevented. Diodec excludes explicitly every implied warranty or liability regarding the fitness of the products to any other than standard applications.

5. All information described or contained herein are subject to change without notice. Please contact Diodec to obtain the latest information before incorporating Diodec products into any design.

6. All information described and contained herein are intended only to enable the buyer to order Diodec's products. The information must not be used for any other purpose.

7. In the event that any product described or contained herein falls under the category of strategic products controlled by the German Federal Office of Economics and Export Control, this product must not be exported without obtaining an export license from the German Federal Ministry for Economic Affairs and Climate Action in accordance with the valid laws.

Alle Rechte vorbehalten

Die Angaben in unseren Datenblättern und sonstigen Dokumenten sind nach bestem Wissen und Gewissen gemacht. Sie dienen jedoch allein der Beschreibung und sind nicht als zugesagte Eigenschaften im Rechts-Sinne zu verstehen. Es wird keine Gewähr bezüglich Liefermöglichkeit, Ausführung oder Einsatzmöglichkeit der Bauelemente übernommen, noch dass die angegebenen Bauelemente, Baugruppen, Schaltungen etc. frei von Schutzrechten sind.

Wir behalten uns Änderungen der aufgeführten Daten ohne vorherige Ankündigung vor. Alle Änderungen werden jedoch regelmäßig auf unserer Internet-Seite veröffentlicht ¹⁾. Verkauf und Lieferung von Diodec-Produkten erfolgt gemäß unseren "Allgemeinen Geschäftsbedingungen" ²⁾. Die Vervielfältigung aller Dokumente ist nur mit schriftlicher Genehmigung des Vorstandes der Diodec Semiconductor AG gestattet.

Haftungsausschluss

1. Alle beschriebenen oder enthaltenen Produkte sind für den Gebrauch in Standardanwendungen mit einem gewöhnlichen Zuverlässigkeitsniveau entworfen und bestimmt, bekannt als kommerziell/industrielle Anwendungen.

2. Einige Produkte sind mit den speziellen Qualifikationen „AEC-Q101 konform“ oder „AEC-Q101 qualifiziert“ erhältlich. Dies sind Automotive-Standards ³⁾.

3. Falls diese Produkte in Anwendungen verwendet werden sollen, die einen besonderen Grad der Qualität oder Zuverlässigkeit erfordern, z. B. (aber nicht begrenzt auf) lebenserhaltende Geräte oder Systeme, bei denen durch Ausfall oder eine Störung des Produktes menschliches Leben oder Gesundheit direkt beeinflusst werden kann, ist der Anwender verpflichtet sicherzustellen, dass der beabsichtigte Gebrauch des vorgesehenen Produktes unbedenklich ist.

Diodec übernimmt keine Haftung die sich aus solchen Anwendungen oder der Verwendung der Produkte ergibt. Der Gebrauch für alle solche Anwendungen erfolgt auf eigenes und ausschließliches Risiko des Anwenders.

4. Obwohl Diodec die Qualität und die Zuverlässigkeit seiner Produkte beständig erhöht, müssen Kunden ausreichende Sicherheitsvorkehrungen in ihren Designs vornehmen – wie Redundanz, Feuereindämmung und Ausfallschutz – damit Personenschäden, Feuer oder Umweltschädigung verhindert werden können. Diodec schließt ausdrücklich jede implizierte Garantie oder Verbindlichkeit aus, welche die Eignung der Produkte zu irgendwelchen anderen als Standardanwendungen betrifft.

5. Alle Informationen, die hier beschrieben oder enthalten sind, können jederzeit ohne jede Benachrichtigung geändert werden. Vor Einsatz eines Diodec Produktes in irgendeiner Anwendung sind bei Diodec die neuesten Informationen einzuholen.

6. Alle Informationen, die hier beschrieben oder enthalten sind, sollen dem Kunden nur ermöglichen, Diodec Produkte zu bestellen. Die Informationen dürfen zu keinem anderen Zweck verwendet werden.

7. Sollte ein hier beschriebenes oder enthaltenes Produkt unter Beschränkungen fallen, die durch das deutsche Bundesamt für Wirtschaft und Ausfuhrkontrolle geregelt werden, darf dieses Produkt in Übereinstimmung mit den gültigen Gesetzen nicht ohne Exportgenehmigung vom deutschen Bundesministerium für Wirtschaft und Klimaschutz exportiert werden.

1 Refer to <http://diotec.com/> "Products/Product Changes" respectively "News/Datasheets"
Siehe <http://diotec.com/> „Produkte/Produktänderungen“ bzw. „News/Datenblätter“

2 Refer data book or <http://diotec.com/> "Company" – Siehe Datenbuch oder <http://diotec.com/> „Unternehmen“

3 Refer to <http://diotec.com/> "Products/Information/Qualification/Commercial Grade and AEC-Q101"
Siehe <http://diotec.com/> „Produkte/Informationen/Qualifizierung/Standard und AEC-Q101“